





9000M2 SERIES

Music Distribution Application

System Example **Restaurant/Bar**

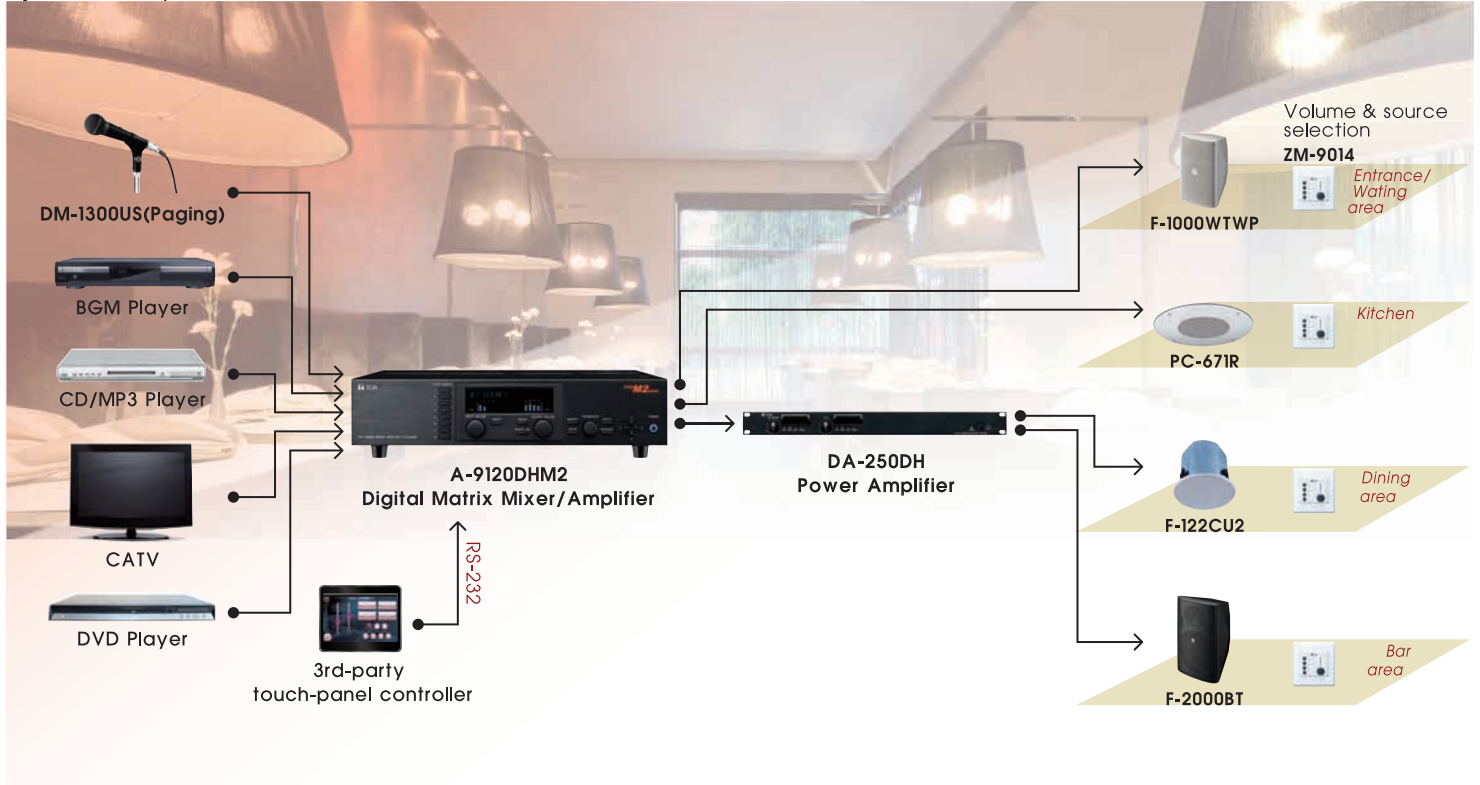

System Example **Fitness Club/Sports Complex**

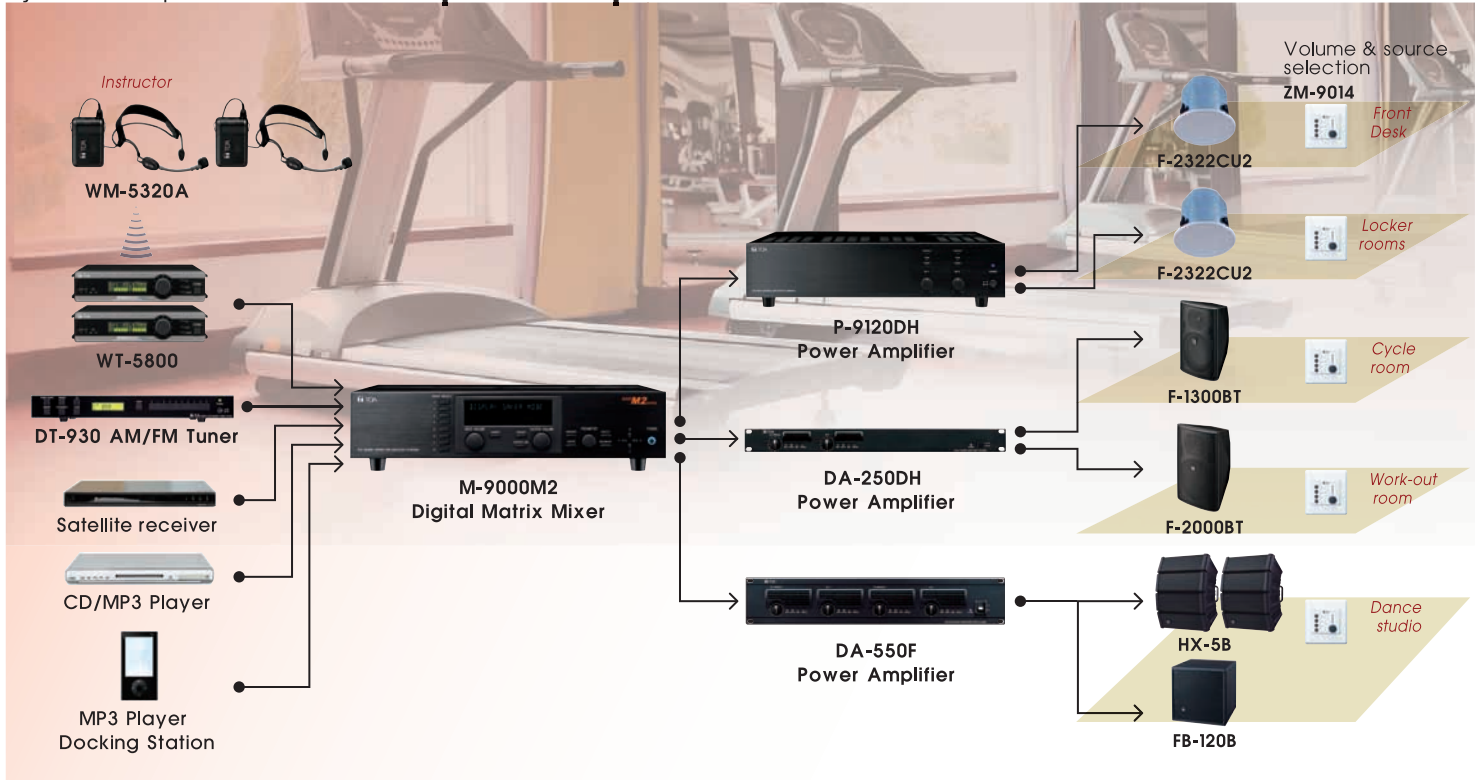



9000M2 Series Digital Matrix Mixer/Amplifier

- Flexible modular design - up to 8 mic/line inputs and 8 outputs.
- Preprogrammed operating system - 32 scene memories and 32 paging memories.
- Up to 16 flush-mount remote panels connectable. The LED indicator provides visual volume level status.
- Detailed GUI software screens make even complex settings intuitive and easy to understand.
- Up to 12 filters and COMP setting can be applied to each input-output channel.
- Any of the 30 EQ presets appropriate to the TOA speakers used may be selected for each output.



DA-Series Multi-channel Power Amplifier

Six models: 250-550W, 2 or 4-channel models available. Extremely high amplification efficiency 80-90%, resulting in reduction in power consumption by more than 60% compared with Class AB Amplifiers. Ultra-low heat dissipation. Comprehensive protection circuitry. Independent power supply for each channel.



F Series Ceiling Speaker

A lineup of six models offering combinations of woofer size, rated input and dispersion. Almost all of the speaker models are UL and cUL listed. Excellent sound quality. Wide-dispersion, smooth off-axis coverage. Fast and easy installation. Low-profile, paintable grille.



F Series Box Speaker

Black/White, high/low impedance, and indoor/outdoor types, 18 models in total. Excellent sound quality. Two-way bass-reflex design. Wide-dispersion characteristics for better sound coverage and more tonal response. Extruded cabinet design improves low frequency performance. Included accessory brackets allow a wide choice of installations on walls, ceilings and speaker stands.



P-9000 Dual-channel Power Amplifier

P-9060DH: 2 x 60W@70.7V, P-9120DH: 2 x 120W@70.7V. Flexible output power allowing 50% of one amplifier channel to be allocated to the second amplifier channel. Channel 1&2 inputs balanced with selectable input sensitivity: 0 dB or -12 dB. Ultra-low distortion: 0.008%.



HX-5 Compact Array Speaker

Black/white, weather-proof versions. 4 models in all. High power handling: 600 W continuous. Adjustable dispersion angle to 60, 45, 30 or 15 degrees. Compact design includes four preassembled modules with four LF drivers and twelve HF dome tweeters. In-line driver arrangement for superior vertical coverage control. Optional brackets for multiple installation. Optional subwoofer, model FB-120 (black and white, indoor use only).

