





9000M2 SERIES Paging Application

System Example **Office/School**

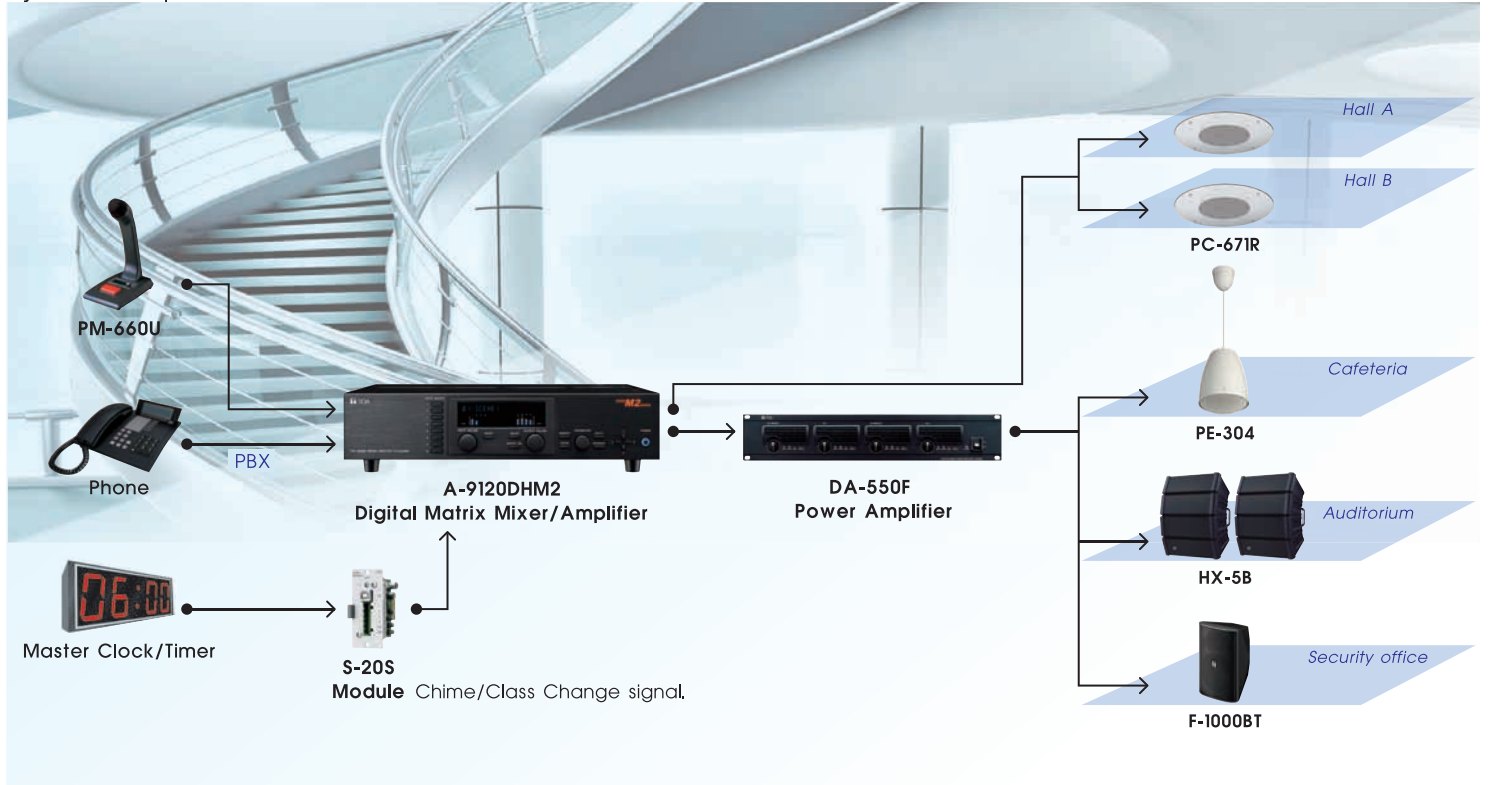

System Example **Retail**

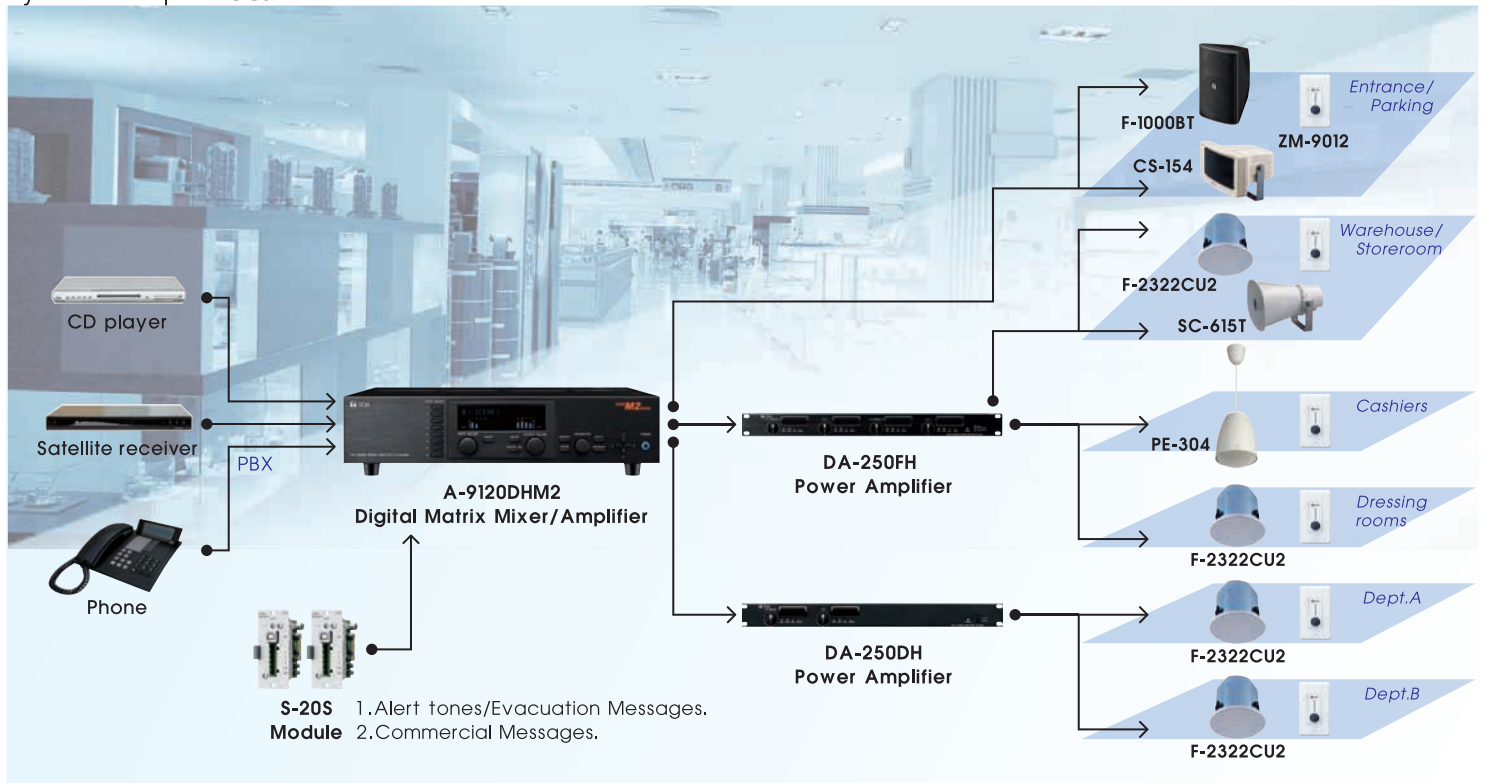



9000M2 Series Digital Matrix Mixer/Amplifer

Flexible modular design - up to 8 mic/line inputs and 8 outputs.

Set 3-level prioritized paging for each activation trigger(up to 32).

ZP-001T module realizes Zone paging using DTMF dialing through Analog Extension or Page port.

Auto-paging is possible with S-20S module which can record and play back wav files from PC.

Detailed GUI software screens make even complex settings intuitive and easy to understand.

Any of the 30 EQ presets appropriate to the TOA speakers used may be selected for each output.



S-20S Sound Repeater Module

USB Interface for fast audio file tranfer between PC and module. Six minutes of CD quality digital storage. Accepts four audio files(wav format). External activation for single or continuous playback.



ZP-001T Telephone Zone Paging Module

Telephone Access Paging to up to eight zones. Uses DTMF dialing to access amplifier and/or line outputs. Dial up to eight output zones in one operation. Analog extension or page port compatible.



DA-Series Multi-channel Power Amplifier

Six models: 250-550W, 2 or 4-channel models available. Extremely high amplification efficiency 80-90%, resulting in reduction in power consumption by more than 60% compared with Class AB Amplifiers. Ultra-low heat dissipation. Comprehensive protection circuitry. Independent power supply for each channel.



DA-250F/FH

PE-304 Pendant Speaker

Stylish and outstanding design inspired by the finest lighting fixtures. Sturdy cable extendable up to 16.4 ft (5 meters). Input impedance easily changeable.



F Series Ceiling Speaker

A lineup of six models offering combinations of woofer size, rated input and dispersion. Almost all of the speakers models are UL and cUL listed. Excellent sound quality. Wide-dispersion, smooth off-axis coverage. Fast and easy installation. Low-profile, paintable grille.



SC Series Horn Speakers

Weather-Resistant to withstand demanding environmental conditions. IP 65 Standards compliant for dust and moisture-resistance. Double re-entrant horn with compression driver for high sensitivity(up to 113dB,1W,1m). Shock-resistant aluminum oval horn.



CS Series Wide Range Horn Speakers

Weather-Resistant to withstand demanding environmental conditions. IP 65 Standards compliant for dust and moisture-resistance. Polyurethane Resin paint resists the fading effects of ultraviolet light.

